
FARBSPRITZ
Paint spraying hose

HANSA FLEX

Properties

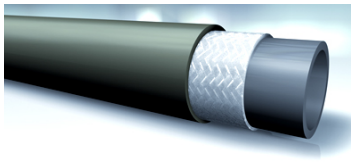

Application	Painting applications
Special features	sturdy durable exceptionally flexible
Inner layer	EPDM (smooth)
Insert	one high tensile synthetic thread braided insert
Outer layer	EPDM (smooth)
Colour	green
Temp. min.	-40 °C
Temp. max.	100 °C
Media	Water soluble paints Fresh and sea water ketonic solvents and a range of chemicals Synthetic resin paints and polyester lacquers Alkalis Acids

Item

Identification	Internal Ø (mm)	External Ø (mm)	Wall thickness (mm)	Operating pressure (bar)
FARBSPRITZ 06-3.5	6	13	3,5	20,0
FARBSPRITZ 09-3.5	9	16	3,5	20,0
FARBSPRITZ 11-4	11	19	4,0	20,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.