
# KOMP T
Compressor hose

## Properties

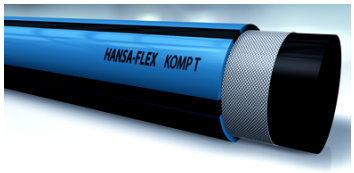


| | |
|---|---|
| **Application** | for compressors, in harsh operating conditions in mining,<br>quarrying, construction, shipyards, petrol stations<br>Low pressure range |
| **Special features** | electrical resistance R less than 10,000,000 Ohm<br>free from LABS, separating agents and grease |
| **Standard** | DIN 20018, EN ISO 2398 |
| **Inner layer** | NBR |
| **Insert** | synthetic yarn braids |
| **Outer layer** | NBR |
| **Colour** | black with blue stripes |
| **Temp. min.** | -40 °C |
| **Temp. max.** | 70 °C |
| **Media** | Water<br>Compressed air containing oil mist |

## Item

| Identification | Inches | Internal Ø (mm) | External Ø (mm) | Wall thickness (mm) | Operating pressure (bar) | Min. bending radius (mm) |
|---|---|---|---|---|---|---|
| **KOMP 19-6 T** | 3/4" | 19 | 31 | 6 | 25,0 | 95 |
| **KOMP 25-7 T** | 1" | 25 | 39 | 7 | 25,0 | 125 |

*Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.*