


# ND DGV MG

Gate valve

**HANSA FLEX**

## Properties

<b>Connection 1 + 2</b>	metric cylindrical outer thread
<b>Sealing form 1 + 2</b>	24° inner cone
<b>Scope of supply</b>	with union nut and cutting ring
<b>Temp. range</b>	mineral oils and fuel oil grades EL and L, 6 bar and up to 80 °C Water: 0 °C to +80 °C
<b>Material</b>	Brass

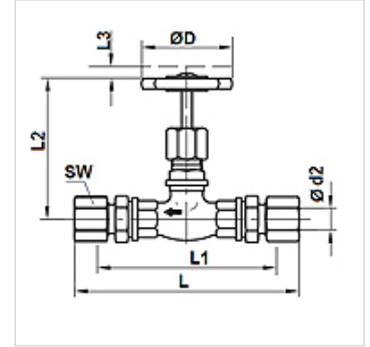

## Item

Identification	DN*	Series	Ø d2 (mm)	Operating pressure (bar)	L (mm)	L1 (mm)	L2 (mm)	L3 (mm)	Ø D (mm)	SF*	AF (mm)
ND DGV NW 04 HL MG	5	L	6	10,0	117	88	63	7	50	1,5	14
ND DGV NW 06 HL MG	6	L	8	10,0	117	88	63	7	50	1,5	17
ND DGV NW 08 HL MG	8	L	10	10,0	119	90	63	7	50	1,5	19
ND DGV NW 10 HL MG	10	L	12	10,0	119	90	63	7	50	1,5	22
ND DGV NW 13 HL MG	12	L	15	10,0	123	93	65	8	50	1,5	27
ND DGV NW 16 HL MG	16	L	18	10,0	126	94	67	8	50	1,5	32
ND DGV NW 20 HL MG	20	L	22	10,0	140	108	67	8	60	1,5	36
ND DGV NW 25 HL MG	25	L	28	10,0	158	125	95	10	60	1,5	41
ND DGV NW 32 HL MG	32	L	35	10,0	188	145	102	10	70	1,5	50

DN = Nominal diameter, nominal width – d2 = for external pipe diameter – AF = Width across flats – SF = Safety factor