
PVC SPIRAL

PVC spiral hose

Properties

Temp. min.	-5 °C
Temp. max.	60 °C
Media	Fresh water Seawater Oil-containing water Contaminated water Liquid manure

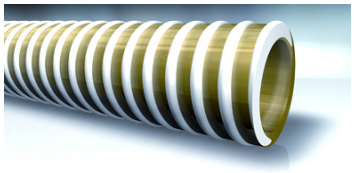

Description

flexible, dimensionally stable spiral suction and pressure hose made from soft PVC with hard PVC helix.

Item

Identification	Internal Ø (mm)	Wall thickness (mm)	Operating pressure (bar)	Vacuum (bar)	Min. bending radius (mm)
PVC SPIRAL 19	19	3,1	5,0	0,7	110
PVC SPIRAL 38	38	3,7	5,0	0,7	210
PVC SPIRAL 45	45	4,0	5,0	0,7	200
PVC SPIRAL 60	60	4,5	5,0	0,7	330
PVC SPIRAL 70	70	5,2	4,0	0,7	500

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.