
TW OW

Tank truck hose without helix

HANSA-FLEX

Properties

Application	Winding hose for tankers
Special features	oil and petrol resistant pressure hose electrical resistance R less than 10,000,000 Ohm
Standard	NW 25: EN 1360; NW 32-40: EN 12115, NW 32-40: TRbF 131 Part 2
Inner layer	NBR
Insert	one textile braided insert with copper braid
Outer layer	NBR / SBR (patterned material)
Colour	black
Temp. min.	-20 °C
Temp. max.	65 °C
Media	All types of mineral oil products with a max. aromatic content of 50%

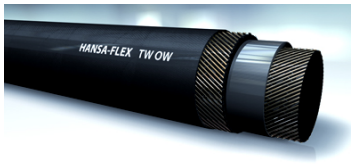

Item

Identification	Inches	Internal Ø (mm)	Wall thickness (mm)	Operating pressure (bar)	Burst pressure (bar)	Min. bending radius (mm)	Roll length (m)
TW OW 25	1"	25	6,0	16,0	64	150	40
TW OW 32	1.1/4"	32	6,0	16,0	64	190	40
TW OW 38	1.1/2"	38	6,5	16,0	64	230	40

Accessories

KS AL	Clamp ring fitting, aluminium
KS FIX AL	Clamping shell for pinning, aluminium
TW-TUE MG	Tank truck fitting, brass
TW-TUEG MG	Tanker fitting, brass
TW-TUEG VA	Tank truck fitting, stainless steel
TW-TG VA	Tank truck fitting, stainless steel
TW-TG MG	Tanker fitting, brass
TW-T MG	Tank truck fitting, brass

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.