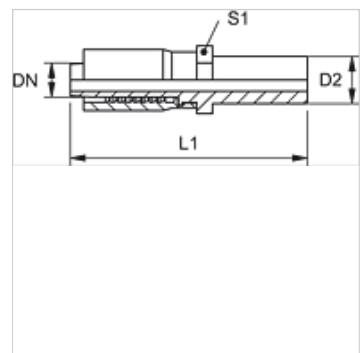


**Properties**

|                 |                              |
|-----------------|------------------------------|
| Connection 1    | Pipe sockets                 |
| Sealing form 1  | Cutting ring connection      |
| Short code      | BES                          |
| Standard        | ISO 8434-1                   |
| Scope of supply | Swage nipple + swage ferrule |
| Material        | Steel                        |
| Surface         | electro galvanised           |

**Note**

Final cutting ring assembly must be carried out in the hardened pre-assembly socket (VOM...).

**Item**

| Identification | DN | Size | Inches | Series | D2<br>(mm) | L1<br>(mm) | AF<br>(mm) |
|----------------|----|------|--------|--------|------------|------------|------------|
| TRP 04 FS      | 5  | 3    | 3/16"  | S      | 8,0        | 59,0       | 14         |
| TRP 06 FS      | 6  | 4    | 1/4"   | S      | 10,0       | 67,0       | 14         |
| TRP 06 FS 04   | 6  | 4    | 1/4"   | S      | 8,0        | 65,0       | 14         |
| TRP 06 FS 08   | 6  | 4    | 1/4"   | S      | 12,0       | 68,0       | 17         |
| TRP 08 FS      | 8  | 5    | 5/16"  | S      | 12,0       | 71,0       | 17         |
| TRP 08 FS 06   | 8  | 5    | 5/16"  | S      | 10,0       | 70,0       | 17         |
| TRP 10 FS      | 10 | 6    | 3/8"   | S      | 14,0       | 79,0       | 19         |
| TRP 10 FS 06   | 10 | 6    | 3/8"   | S      | 10,0       | 75,0       | 19         |
| TRP 10 FS 08   | 10 | 6    | 3/8"   | S      | 12,0       | 77,0       | 19         |
| TRP 13 FS      | 12 | 8    | 1/2"   | S      | 16,0       | 87,0       | 24         |