


### Properties

Application	Connection fitting for metal hoses
Connection 1	imperial internal thread, cylindrical
Sealing form 1	conical seat
Standard	DIN EN 10226 / ISO 7-1
Construction	straight
Application	soldered variant temperature resistant up to 200 °C
Design	3-part threaded connection
Material	Red bronze

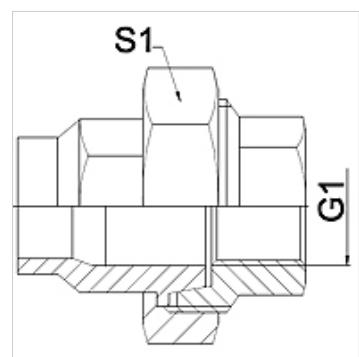

### Note

Width across flats values are listed for reference purposes!

### Ordering information

Other designs available on request

### Item

Identification	DN	G1	S1 (mm)
WA 010 VB RG	10	Rp 3/8"	32,0
WA 013 VB RG	13	Rp 1/2"	41,0
WA 020 VB RG	20	Rp 3/4"	50,0
WA 025 VB RG	25	Rp 1"	55,0
WA 032 VB RG	32	Rp 1 1/4"	70,0
WA 040 VB RG	40	Rp 1 1/2"	75,0
WA 050 VB RG	50	Rp 2"	90,0

### Product versions

WA VB	Connector ... VB, malleable cast iron, Malleable cast iron
WA VB VA	Connector ... VB, VA, Stainless steel