


WA VB RG

Connector ... VB, red bronze

HANSA FLEX

Properties

| | |
|-----------------------|---|
| Application | Connection fitting for metal hoses |
| Connection 1 | imperial internal thread, cylindrical |
| Sealing form 1 | conical seat |
| Standard | DIN EN 10226 / ISO 7-1 |
| Construction | straight |
| Application | soldered variant temperature resistant up to 200 °C |
| Design | 3-part threaded connection |
| Material | Red bronze |

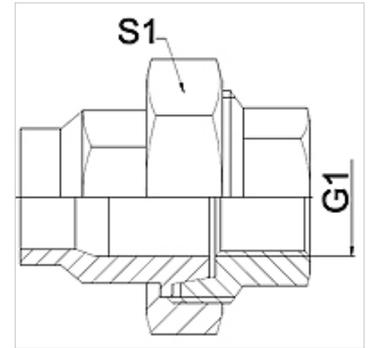

Note

Width across flats values are listed for reference purposes!

Ordering information

Other designs available on request

Item

| Identification | DN | G1 | S1 (mm) |
|----------------|----|-----------|------------|
| WA 010 VB RG | 10 | Rp 3/8" | 32,0 |
| WA 013 VB RG | 13 | Rp 1/2" | 41,0 |
| WA 020 VB RG | 20 | Rp 3/4" | 50,0 |
| WA 025 VB RG | 25 | Rp 1" | 55,0 |
| WA 032 VB RG | 32 | Rp 1.1/4" | 70,0 |
| WA 040 VB RG | 40 | Rp 1.1/2" | 75,0 |
| WA 050 VB RG | 50 | Rp 2" | 90,0 |

Product versions

| | |
|-----------------|--|
| WA VB | Connector ... VB, malleable cast iron, Malleable cast iron |
| WA VB VA | Connector ... VB, VA, Stainless steel |