


### Properties

|                |   |
|----------------|---|
| Application    | Vacuum systems that function in a rough, fine and high vacuum (10–9 mbar depending on the seals) for positive pressure applications up to 2.5 bar |
| Application    | Connection fitting for metal hoses  |
| Connection 1   | Small flanges for vacuum technology   |
| Sealing form 1 | flat seal with O-ring .   |
| Material       | Stainless steel   |
| Standard       | DIN 28403<br>ISO 2861   |
| Construction   | straight  |

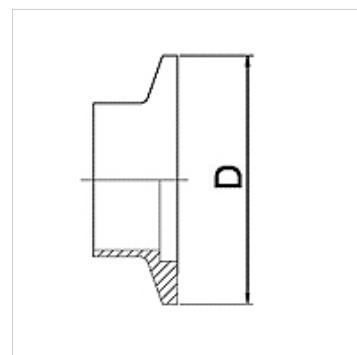

### Ordering information

Other designs available on request

#### Item

| Identification | DN | D<br>(mm) |
|----------------|----|-----------|
| WA 010 KF VA   | 10 | 30,0      |
| WA 016 KF VA   | 16 | 30,0      |
| WA 020 KF VA   | 20 | 40,0      |
| WA 025 KF VA   | 25 | 40,0      |
| WA 032 KF VA   | 32 | 55,0      |
| WA 040 KF VA   | 40 | 55,0      |
| WA 050 KF VA   | 50 | 75,0      |