


## Properties

<b>Application</b>	Vacuum systems that function in a rough, fine and high vacuum (10 <sup>-9</sup> mbar depending on the seals) for positive pressure applications up to 2.5 bar
<b>Application</b>	Connection fitting for metal hoses
<b>Connection 1</b>	Small flanges for vacuum technology
<b>Sealing form 1</b>	flat seal with O-ring .
<b>Material</b>	Stainless steel
<b>Standard</b>	DIN 28403 ISO 2861
<b>Construction</b>	straight

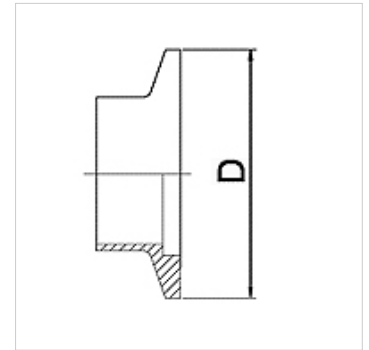

## Ordering information

Other designs available on request

## Item

Identification	DN	D (mm)
WA 010 KF VA	10	30,0
WA 016 KF VA	16	30,0
WA 020 KF VA	20	40,0
WA 025 KF VA	25	40,0
WA 032 KF VA	32	55,0
WA 040 KF VA	40	55,0
WA 050 KF VA	50	75,0