
WA TRI VA

Connector ... TRI-Clamp connector, VA

Properties

Application	Connection fitting for metal hoses
Application	Use in the food-, chemical and pharmaceutic areas
Connection 1	Clamp socket
Sealing form 1	O-ring seal
Standard	DIN 32676
Construction	straight
Material	Stainless steel



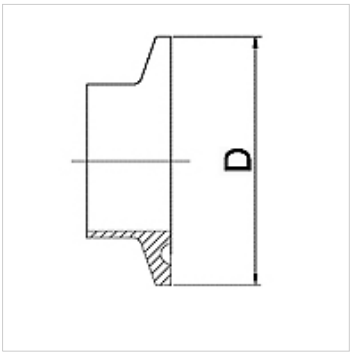

Note

The permissible pressures are designed for temperatures from -10 °C to 140 °C when suitable brackets and sealing materials are used.

Ordering information

Other designs available on request

Item

Identification	DN	PN (bar)	D (mm)
WA 008 TRI-25 VA	8	25	25,0
WA 010 TRI-34 VA	10	25	34,0
WA 013 TRI-25 VA	13	25	25,0
WA 013 TRI-34 VA	13	25	34,0
WA 020 TRI-34 VA	20	25	34,0
WA 025 TRI-50.5 VA	25	25	50,5
WA 032 TRI-50.5 VA	32	25	50,5
WA 040 TRI-50.5 VA	40	25	50,5
WA 050 TRI-64 VA	50	16	64,0
WA 050 TRI-77.5 VA	50	16	77,5
WA 065 TRI-91 VA	65	16	91,0
WA 080 TRI-106 VA	80	10	106,0
WA 100 TRI-119 VA	100	10	119,0
WA 125 TRI-155 VA	125	10	155,0
WA 150 TRI-183 VA	150	10	183,0

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.