


HK AGRL

Non-return valve for plate mounting Cetop P

HANSA FLEX

Properties

Design	pilot-controlled
Material	Steel
Operating pressure	max. 315 bar
Volumetric flow	max. 500 l/min
Connection	ISO/Cetop P

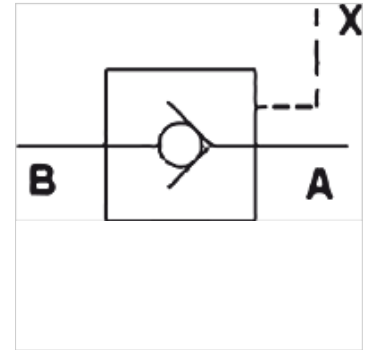

Note

Mounting: 4 No. Allen screws M10x45 for HK AGRL 10 / 20; 4 No. Allen screws M10x100 for HK AGRL 32

Item

Identification	Flow rate max. (L/min)	Pilot control pressure ratio	Design	Weight (kg)
HK AGRL 10	160	2.5	ISO/Cetop 06P	4,0
HK AGRL 20	300	2.1	ISO/Cetop 08P	7,0
HK AGRL 32	500	2.55	ISO/Cetop 10P	14,8

Accessories

HK BA AGRL	Mounting plate for non-return valve AGRL
HK M HK AGRL	Screw kit for non-return valve Type HK AGRL