


### Properties

Design	pilot-controlled with damping piston
Operating pressure	max. 350 bar

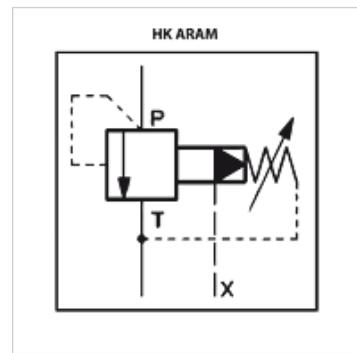

### Note

These valves must be set according to the application.

X port for optional remote control, sealed as standard

### Item

Identification	Pressure setting range bar	Q max. (L/min)	A (mm)	B (mm)	Connection P	Connection T	Connection X	Weight (kg)
HK ARAM 20 100	6 - 100	350	126	139	G 3/4"	G 1"	G 1/4"	3,9
HK ARAM 20 210	7 - 210	350	126	139	G 3/4"	G 1"	G 1/4"	3,9
HK ARAM 20 350	8 - 350	350	126	139	G 3/4"	G 1"	G 1/4"	3,9