
HK ARE

Pressure relief valve ARE

Properties

Design	direct-controlled Type R with low internal leakage
Operating pressure	up to 500 bar



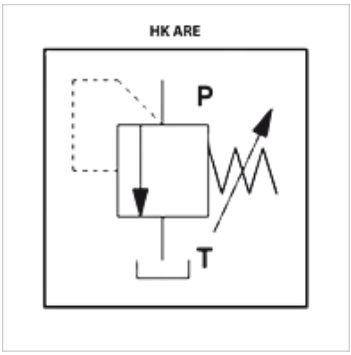

Note

These valves must be set according to the application.

Item

Identification	Pressure setting range bar	Q max. (L/min)	A (mm)	B (mm)	Connection P	Connection T	Weight (kg)
HK ARE 06 100 R	3 - 100	40	140	62	G 1/4”	G 3/8”	1,0
HK ARE 06 210 R	10 - 210	40	140	62	G 1/4”	G 3/8”	1,0
HK ARE 06 350 R	15 - 350	40	140	62	G 1/4”	G 3/8”	1,0
HK ARE 06 500 R	30 - 500	40	140	62	G 1/4”	G 3/8”	1,0
HK ARE 15 15 R	2 - 15	75	165	62	G 1/2”	G 1/2”	1,3
HK ARE 15 75 R	4 - 75	75	165	62	G 1/2”	G 1/2”	1,3
HK ARE 15 150 R	8 - 150	75	165	62	G 1/2”	G 1/2”	1,3
HK ARE 15 250 R	8 - 250	75	165	62	G 1/2”	G 1/2”	1,3

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.