


# HK AZ11

## Blind plugs

### Properties

<b>Operating pressure</b>	max. 700 bar
<b>Connection 1</b>	NPT external threads
<b>Design</b>	Blanking socket, with hexagon head
<b>Construction</b>	straight
<b>Sealing form 1</b>	thread seal
<b>Surface</b>	galvanised

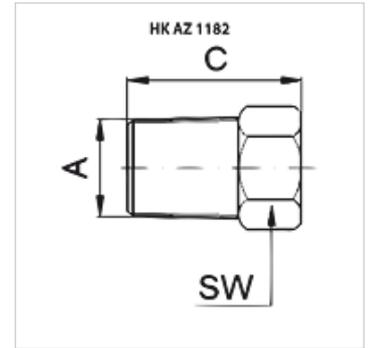

### Item

Identification	A	C (mm)	AF (mm)	Weight (kg)
<b>HK AZ 1182</b>	NPT 3/8" -18	24	18	0,7

AF = Width across flats

### Accessories

<b>NY 2100</b>	Thermoplastic extreme pressure hose
<b>GKS</b>	Rubber antikink protection
<b>PNY 2100 HN</b>	Swage nipple, AGN
<b>PHY 2100</b>	Swage ferrule, NY 2100
<b>SKL HN SP</b>	Screwed coupling, loose half
<b>SKL ZUBS SP</b>	Dust protection for SKL...SP
<b>SKF IN SP</b>	Screwed coupling fixed half
<b>SKF ZUBS SP</b>	Dust protection for SKF...SP