


**Properties**

Operating pressure max. 700 bar

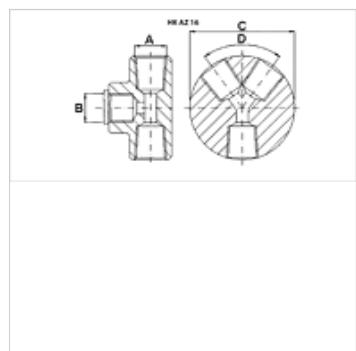

**Note**

Inlet B: Pressure gauge fitting with blank plug

**Item**

| Identification | Connections         | A            | B            | C<br>(mm) | Angle D<br>(°) | Weight<br>(kg) |
|----------------|---------------------|--------------|--------------|-----------|----------------|----------------|
| HK AZ 1604     | 1 inlet / 4 outlets | NPT 3/8" -18 | BSP 3/8" -19 | 82,0      | 60             | 1,9            |
| HK AZ 1606     | 1 inlet / 6 outlets | NPT 3/8" -18 | BSP 3/8" -19 | 102,0     | 48             | 2,9            |

**Accessories**

|             |                                     |
|-------------|-------------------------------------|
| NY 2100     | Thermoplastic extreme pressure hose |
| GKS         | Rubber antikink protection          |
| PNY 2100 HN | Swage nipple, AGN                   |
| PHY 2100    | Swage ferrule, NY 2100              |
| SKL HN SP   | Screwed coupling, loose half        |
| SKL ZUBS SP | Dust protection for SKL...SP        |
| SKF IN SP   | Screwed coupling fixed half         |
| SKF ZUBS SP | Dust protection for SKF...SP        |