

HK AZ52 DRV


Regulating check valve 700 bar

HANSA FLEX

Properties

Operating pressure max. 700 bar

Volumetric flow max. 25 l/min

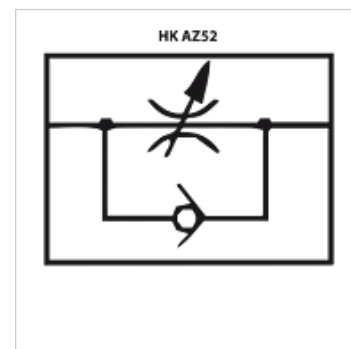

Note

Supplied without threaded connections

Item

| Identification | Thread | Weight (kg) |
|----------------|----------|-------------|
| HK AZ 5255 | 3/8" NPT | 0,94 |

Accessories

| | |
|-------------|-------------------------------------|
| NY 2100 | Thermoplastic extreme pressure hose |
| GKS | Rubber antikink protection |
| PNY 2100 HN | Swage nipple, AGN |
| PHY 2100 | Swage ferrule, NY 2100 |
| SKL HN SP | Screwed coupling, loose half |
| SKL ZUBS SP | Dust protection for SKL...SP |
| SKF IN SP | Screwed coupling fixed half |
| SKF ZUBS SP | Dust protection for SKF...SP |