


# HK DH01

Hand-operated directional control valve NG6

**HANSA FLEX**

## Properties

<b>Design</b>	4/2-way valve or 4/3-way valve
<b>Operating pressure</b>	P, A, B: max. 350bar / T: max. 160bar
<b>Volumetric flow</b>	max. 50 l/min (note characteristic curves)
<b>Connection</b>	ISO/Cetop 03 size 6
<b>Mounting</b>	4 pcs. socket head screw M5x50 12.9

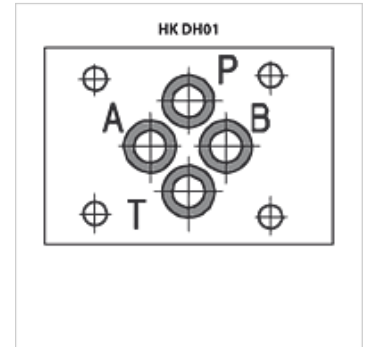

## Description

Mechanical operation with hand lever  
Hand lever mounted on side "A"

## Ordering information

Further circuits and versions available on request

## Item

Identification	Type	Overlap	Piston type	Design	Weight (kg)
HK DH01 20	4/2	negative (open)	0 [PB/AT]-[PA/BT]	Spring return	1,6
HK DH01 21	4/2	positive (closed)	1 [PB/AT]-[PA/BT]	Spring return	1,6
HK DH01 50	4/2	negative (open)	0 [PB/AT]-[PA/BT]	2 latching positions	1,6
HK DH01 51	4/2	positive (closed)	1 [PB/AT]-[PA/BT]	2 latching positions	1,6
HK DH01 10	4/3	negative (open)	0 [PB/AT]-[ABPT]-[PA/BT]	spring return to 0	1,6
HK DH01 11	4/3	positive (closed)	1 [PB/AT]-[A/B/P/T]-[PA/BT]	spring return to 0	1,6
HK DH01 13	4/3	positive (closed)	3 [PB/AT]-[ABT/P]-[PA/BT]	spring return to 0	1,6
HK DH01 14	4/3	negative (open)	4 [PA/BT]-[A/B/PT]-[PB/AT]	spring return to 0	1,6
HK DH01 40	4/3	negative (open)	0 [PB/AT]-[ABPT]-[PA/BT]	3 latching positions	1,6
HK DH01 41	4/3	positive (closed)	1 [PB/AT]-[A/B/P/T]-[PA/BT]	3 latching positions	1,6
HK DH01 43	4/3	positive (closed)	3 [PB/AT]-[ABT/P]-[PA/BT]	3 latching positions	1,6
HK DH01 44	4/3	negative (open)	4 [PA/BT]-[A/B/PT]-[PB/AT]	3 latching positions	1,6

Piston type example: [A/B/PT] = [A blocked / B blocked / P+T connected]

## Accessories

HK M HK DH Screw set for NG 6 valves type HK DH / DG4V3