


# HK DH04/05

Directional control valve NG6, hydraulically controlled

**HANSA FLEX**

## Properties

<b>Design</b>	4/2-way valve or 4/3-way valve
<b>Operating pressure</b>	P, A, B: max. 350bar / T: max. 210bar
<b>Volumetric flow</b>	max. 50 l/min (note characteristic curves)
<b>Connection</b>	ISO/Cetop 03 size 6
<b>Mounting</b>	4 pcs. socket head screw M5x50 12.9

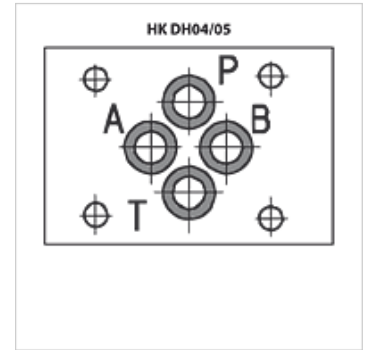

## Description

Hydraulic actuation with emergency hand operation

Min. control pressure 3 bar / max. control pressure 70 bar / recommended control pressure 30 bar

Thread on control pressure port 1/8" female thread

## Ordering information

Further circuits and versions available on request

## Item

Identification	Type	Overlap	Piston type	Design	Weight (kg)
HK DH04 31 2	4/2	positive (closed)	1 [PB/AT]-[PA/BT]	Spring return	1,2
HK DH05 51 2	4/2	positive (closed)	1 [PB/AT]-[PA/BT]	2 external positions with detent	1,2
HK DH05 10	4/3	negative (open)	0 [PB/AT]-[ABPT]-[PA/BT]	spring return to 0	1,2
HK DH05 11	4/3	positive (closed)	1 [PB/AT]-[A/B/P/T]-[PA/BT]	spring return to 0	1,2
HK DH05 13	4/3	positive (closed)	3 [PB/AT]-[ABT/P]-[PA/BT]	spring return to 0	1,2

Piston type example: [A/B/PT] = [A blocked / B blocked / P+T connected]

## Accessories

HK M HK DH	Screw set for NG 6 valves type HK DH / DG4V3
------------	--