


HK DK11

Hand-operated directional control valve NG10

HANSA FLEX

Properties

Design	4/2-way valve or 4/3-way valve
Operating pressure	P, A, B: max. 315bar / T: max. 160bar
Volumetric flow	max. 100 l/min (note characteristic curves)
Connection	ISO/Cetop 05 size 10
Mounting	4 pcs. socket head screw M6x40 12.9

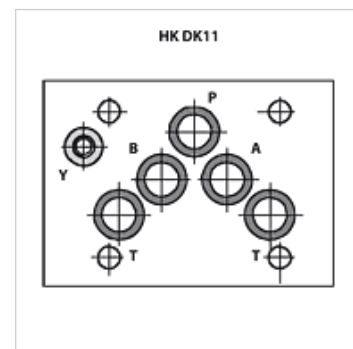

Description

Mechanical operation with hand lever

Hand lever mounted on side "A"

Ordering information

Further circuits and versions available on request

Item						
Identification	Type	Overlap	Piston type	Design	Weight (kg)	
HK DK11 20	4/2	negative (open)	0 [PB/AT]-[PA/BT]	Spring return	2,5	
HK DK11 21	4/2	positive (closed)	1 [PB/AT]-[PA/BT]	Spring return	2,5	
HK DK11 50	4/2	negative (open)	0 [PB/AT]-[PA/BT]	2 latching positions	2,5	
HK DK11 51	4/2	positive (closed)	1 [PB/AT]-[PA/BT]	2 latching positions	2,5	
HK DK11 10	4/3	negative (open)	0 [PB/AT]-[ABPT]-[PA/BT]	spring return to 0	2,8	
HK DK11 11	4/3	positive (closed)	1 [PB/AT]-[A/B/P/T]-[PA/BT]	spring return to 0	2,8	
HK DK11 13	4/3	positive (closed)	3 [PB/AT]-[ABT/P]-[PA/BT]	spring return to 0	2,8	
HK DK11 14	4/3	negative (open)	4 [PA/BT]-[A/B/PT]-[PB/AT]	spring return to 0	2,8	
HK DK11 40	4/3	negative (open)	0 [PB/AT]-[ABPT]-[PA/BT]	3 latching positions	2,8	
HK DK11 41	4/3	positive (closed)	1 [PB/AT]-[A/B/P/T]-[PA/BT]	3 latching positions	2,8	
HK DK11 43	4/3	positive (closed)	3 [PB/AT]-[ABT/P]-[PA/BT]	3 latching positions	2,8	
HK DK11 44	4/3	negative (open)	4 [PA/BT]-[A/B/PT]-[PB/AT]	3 latching positions	2,8	

Piston type example: [A/B/PT] = [A blocked / B blocked / P+T connected]

Accessories

HK M HK DK Set of bolts for NG 10 valves types HK DK11/DKE/DG4V5