
HK DK11

Hand-operated directional control valve NG10

Properties

Design	4/2-way valve or 4/3-way valve
Operating pressure	P, A, B: max. 315bar / T: max. 160bar
Volumetric flow	max. 100 l/min (note characteristic curves)
Connection	ISO/Cetop 05 size 10
Mounting	4 pcs. socket head screw M6x40 12.9



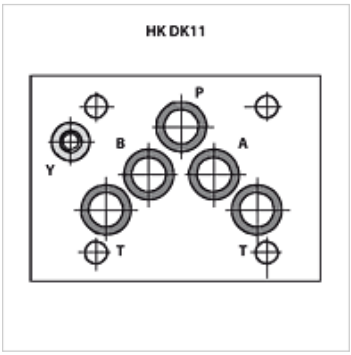

Description

Mechanical operation with hand lever
Hand lever mounted on side "A"

Ordering information

Further circuits and versions available on request

Item

Identification	Type	Overlap	Piston type		Design	Weight (kg)
HK DK11 20	4/2	negative (open)	0	[PB/AT]-[PA/BT]	Spring return	2,5
HK DK11 21	4/2	positive (closed)	1	[PB/AT]-[PA/BT]	Spring return	2,5
HK DK11 50	4/2	negative (open)	0	[PB/AT]-[PA/BT]	2 latching positions	2,5
HK DK11 51	4/2	positive (closed)	1	[PB/AT]-[PA/BT]	2 latching positions	2,5
HK DK11 10	4/3	negative (open)	0	[PB/AT]-[ABPT]-[PA/BT]	spring return to 0	2,8
HK DK11 11	4/3	positive (closed)	1	[PB/AT]-[A/B/P/T]-[PA/BT]	spring return to 0	2,8
HK DK11 13	4/3	positive (closed)	3	[PB/AT]-[ABT/P]-[PA/BT]	spring return to 0	2,8
HK DK11 14	4/3	negative (open)	4	[PA/BT]-[A/B/PT]-[PB/AT]	spring return to 0	2,8
HK DK11 40	4/3	negative (open)	0	[PB/AT]-[ABPT]-[PA/BT]	3 latching positions	2,8
HK DK11 41	4/3	positive (closed)	1	[PB/AT]-[A/B/P/T]-[PA/BT]	3 latching positions	2,8
HK DK11 43	4/3	positive (closed)	3	[PB/AT]-[ABT/P]-[PA/BT]	3 latching positions	2,8
HK DK11 44	4/3	negative (open)	4	[PA/BT]-[A/B/PT]-[PB/AT]	3 latching positions	2,8

Piston type example: [A/B/PT] = [A blocked / B blocked / P+T connected]

Accessories

HK M HK DK	Set of bolts for NG 10 valves types HK DK11/DKE/DG4V5

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.