


## Properties

<b>Scope of supply</b>	with coil, 24 DC without plug
<b>Operating pressure</b>	P, A, B: max. 350bar / T: max. 160bar
<b>Volumetric flow</b>	max. 30 l/min (note characteristic curves)
<b>Connection</b>	ISO/Cetop 03 size 6
<b>Mounting</b>	4 pcs. socket head screw M5x50 12.9

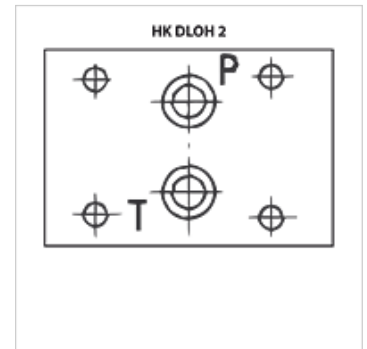

## Note

The valves of type HK DLOH can be equipped with a plug-in non-return valve in port P (see accessories).

## Description

2-way or 3-way seat valves with 2 switching positions  
Solenoids and all moving parts switch internally in oil  
Solenoid coil 24 VDC with emergency hand operation

## Item

Identification	Type	Volumetric flow max. (L/min)	Design	Weight (kg)
HK DLOH 2AU X 24DC	2/2	12,0	power-off open	1,5
HK DLOH 2CU X 24DC	2/2	12,0	power-off closed	1,5
HK DLOH 3AU X 24DC	3/2	12,0	power-off open	1,5
HK DLOH 3CU X 24DC	3/2	12,0	power-off closed	1,5
HK DLOK 3AO X 24DC	3/2	30,0	power-off open	1,5
HK DLOK 3CO X 24DC	3/2	30,0	power-off closed	1,5

## Accessories

HK SP 6 DLOH	Plug-in non-return valve
HK SP DIN 43650	Electrical plug for solenoid coil DIN 43650 / ISO 4400
HK M HK DH	Screw set for NG 6 valves type HK DH / DG4V3