
HK DLO
Poppet valve NG6

Properties

Scope of supply	with coil, 24 DC without plug
Operating pressure	P, A, B: max. 350bar / T: max. 160bar
Volumetric flow	max. 30 l/min (note characteristic curves)
Connection	ISO/Cetop 03 size 6
Mounting	4 pcs. socket head screw M5x50 12.9



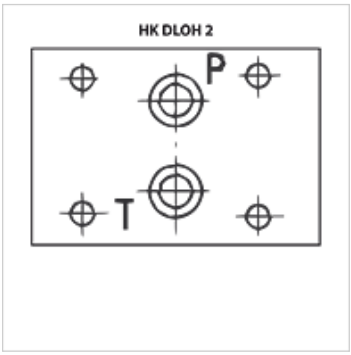

Note

The valves of type HK DLOH can be equipped with a plug-in non-return valve in port P (see accessories).

Description

2-way or 3-way seat valves with 2 switching positions
Solenoids and all moving parts switch internally in oil
Solenoid coil 24 VDC with emergency hand operation

Item

Identification	Type	Volumetric flow max. (L/min)	Design	Weight (kg)
HK DLOH 2AU X 24DC	2/2	12,0	power-off open	1,5
HK DLOH 2CU X 24DC	2/2	12,0	power-off closed	1,5
HK DLOH 3AU X 24DC	3/2	12,0	power-off open	1,5
HK DLOH 3CU X 24DC	3/2	12,0	power-off closed	1,5
HK DLOK 3AO X 24DC	3/2	30,0	power-off open	1,5
HK DLOK 3CO X 24DC	3/2	30,0	power-off closed	1,5

Accessories

HK SP 6 DLOH	Plug-in non-return valve
HK SP DIN 43650	Electrical plug for solenoid coil DIN 43650 / ISO 4400
HK M HK DH	Screw set for NG 6 valves type HK DH / DG4V3

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.