


# HK EH 1460

## Screw-in tubular heaters

### Properties

<b>Design</b>	with or without temperature controller
<b>Connection</b>	G 1 1/2"
<b>Use</b>	for preheating of hydraulic oil

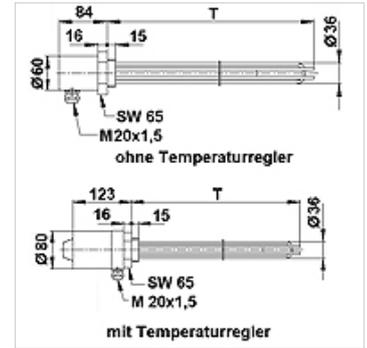

### Description

For horizontal installation under the oil surface  
 Surface load 1.5 W/cm<sup>2</sup> for hydraulic oils  
 Glossy galvanised steel cover

### Item

Identification	Heating capacity (W)	Immersion depth (mm)	Protection class	Voltage	Temp. control	Weight (kg)
<b>HK EH 1460 650 TA 3X4</b>	1460	650	IP 54	3 x 400 V	external	1,9
<b>HK EH 1460 650 3X4</b>	1460	650	IP 65	3 x 400 V	without	1,7