


HK EH 1460

Screw-in tubular heaters

Properties

Design	with or without temperature controller
Connection	G 1 1/2"
Use	for preheating of hydraulic oil

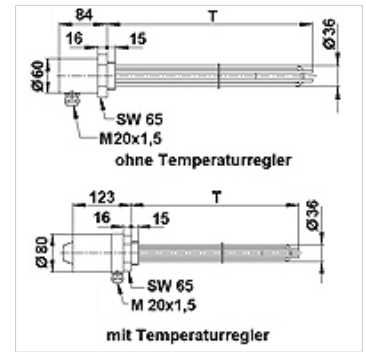

Description

For horizontal installation under the oil surface
 Surface load 1.5 W/cm² for hydraulic oils
 Glossy galvanised steel cover

Item

Identification	Heating capacity (W)	Immersion depth (mm)	Protection class	Voltage	Temp. control	Weight (kg)
HK EH 1460 650 TA 3X4	1460	650	IP 54	3 x 400 V	external	1,9
HK EH 1460 650 3X4	1460	650	IP 65	3 x 400 V	without	1,7