


HK EH 1460

Screw-in tubular heaters



Properties	
Design	with or without temperature controller
Connection	G 1 1/2"
Use	for preheating of hydraulic oil

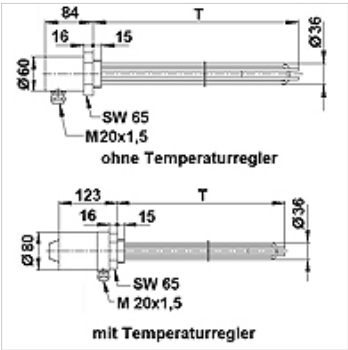

Description
 For horizontal installation under the oil surface
 Surface load 1.5 W/cm2 for hydraulic oils
 Glossy galvanised steel cover

Item						
Identification	Heating capacity (W)	Immersion depth (mm)	Protection class	Voltage	Temp. control	Weight (kg)
HK EH 1460 650 TA 3X4	1460	650	IP 54	3 x 400 V	external	1,9
HK EH 1460 650 3X4	1460	650	IP 65	3 x 400 V	without	1,7