
HK EH 1460
Screw-in tubular heaters

Properties

Design	with or without temperature controller
Connection	G 1 1/2"
Use	for preheating of hydraulic oil



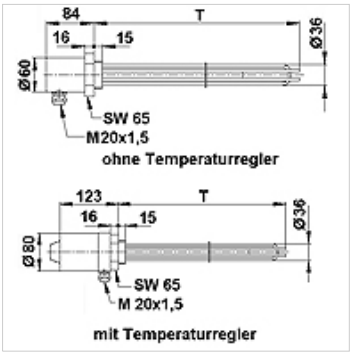

Description

For horizontal installation under the oil surface
Surface load 1.5 W/cm2 for hydraulic oils
Glossy galvanised steel cover

Item

Identification	Heating capacity (W)	Immersion depth (mm)	Protection class	Voltage	Temp. control	Weight (kg)
HK EH 1460 650 TA 3X4	1460	650	IP 54	3 x 400 V	external	1,9
HK EH 1460 650 3X4	1460	650	IP 65	3 x 400 V	without	1,7

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.