


### Properties

**Design** Asymmetric rising and falling ramps and 4 setpoint potentiometers  
stabilised: 24 VDC rectified and filtered 21 - 33 V  
Power consumption 50 W

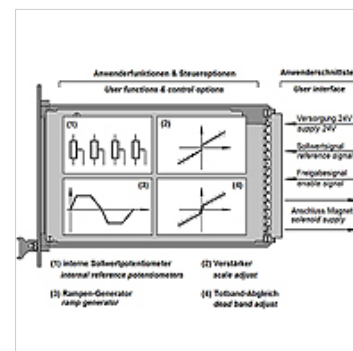

### Description

Eurocard format 100x160  
for single solenoid and double solenoid proportional valves without transducer  
for use in open and closed control loops  
Electronic filter on inlet and outlet  
double side shielding  
PE-Faston plug for electrical grounding  
Nominal setpoint signal preset to 0 - 10 VDC

### Item

Identification	for valve type	Weight (kg)
HK EME AC 01F RR4 1	Single solenoid for HK RZGO	0,6
HK EME AC 01F RR4 2	Single solenoid for HK RZMO	0,6
HK EME AC 01F RR4 3	Single solenoid for proportional valves	0,6
HK EME AC 05F RR4 3	Double solenoid for proportional valves	0,6

### Accessories

HK EK M Mechanical frame for Eurocard electronic driver