
HK GEH 40 AL


Housing for flow divider SAE 3-way aluminium

HANSA-FLEX

Properties

Material	Aluminium AlZnMgCu1.5
Operating pressure	max. 250 bar
Surface	anodised

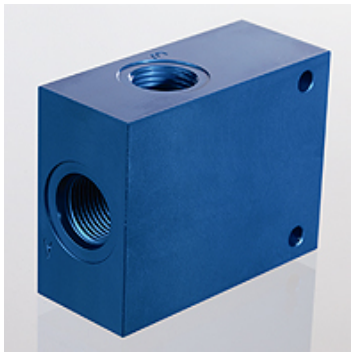

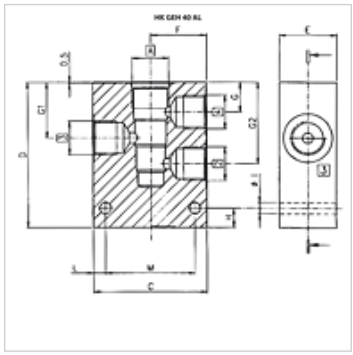

Item

Identification	Valve bore	A	Connec-tion2,3,5	C (mm)	D (mm)	E (mm)	F (mm)	G (mm)	G1 (mm)	G2 (mm)	H (mm)	I (mm)	L (mm)	M (mm)	Weight (kg)
HK GEH 12 C1040 ST	C1040	UNF 7/8" -14	G 1/2”	70	90	39	35	18,5	34	50	12	7	7,5	54	0,6

Accessory for following products

HK FDCV	Flow divider / combiner FDCV

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.