


# HK GP

Rubber-metallic buffer

## Properties

### Material

Galvanised steel

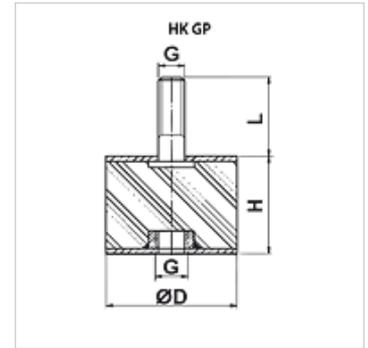

## Description

With threaded bolt and inside thread

Can also be used as an alternative to damping rails

## Ordering information

Other sizes and versions available on request

## Item

| Identification    | Ø D<br>(mm) | G    | H<br>(mm) | L<br>(mm) | permissible dyn. load<br>(N) | Weight<br>(kg) |
|-------------------|-------------|------|-----------|-----------|------------------------------|----------------|
| HK GP 4030 M10 B  | 40,0        | M 10 | 30,0      | 28,0      | 1150                         | 0,3            |
| HK GP 7540 M12 B  | 75,0        | M 12 | 40,0      | 37,0      | 1600                         | 0,5            |
| HK GP 10040 M16 B | 100,0       | M 16 | 40,0      | 46,0      | 5600                         | 0,8            |