


### Properties

|                    |  |
|--------------------|--|
| Design             | Sandwich body valve<br>direct-controlled |
| Operating pressure | max. 350 bar                             |
| Volumetric flow    | max. 40 l/min                            |
| Connection         | ISO/Cetop 03 size 6                      |

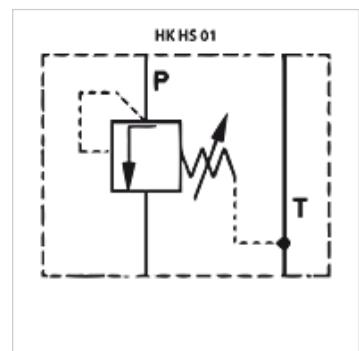

### Note

These valves must be set according to the application.

### Description

Sandwich body valve for constructing sandwich arrangements with ISO/Cetop 03 size 6 valves

### Ordering information

Further sandwich body valves available on request

### Item

| Identification | acts in channel | Pressure setting range min.<br>(bar) | Pressure setting range max.<br>(bar) | Plate height<br>(mm) | Weight<br>(kg) |
|----------------|-----------------|--------------------------------------|--------------------------------------|----------------------|----------------|
| HK HS 011 32   | P               | 3                                    | 32                                   | 40                   | 2,0            |
| HK HS 011 100  | P               | 20                                   | 100                                  | 40                   | 2,0            |
| HK HS 011 210  | P               | 50                                   | 210                                  | 40                   | 2,0            |

### Accessories

HK EBM AS Proportional amplifier digital