


# HK HZGO A 031

Proportional pressure reducing valve size 6

**HANSA FLEX**

## Properties

<b>Design</b>	Proportional sandwich body valve pilot-controlled
<b>Scope of supply</b>	with coil, without plug
<b>Operating pressure</b>	max. 315 bar
<b>Volumetric flow</b>	max. 40 l/min
<b>Connection</b>	ISO/Cetop 03 size 6

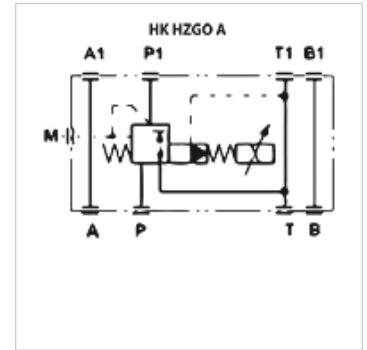

## Description

Sandwich body valve for constructing sandwich arrangements with ISO/Cetop 03 size 6 valves  
Without integrated pressure transducer (a pcb Type HK EBM AS is required for control)  
Completely encapsulated solenoid coils  
Plate height: 50 mm  
Response time < 50 ms  
Hysteresis < 2%

## Item

Identification	acts in channel	Pressure setting range min. (bar)	Pressure setting range max. (bar)	Volumetric flow min. (L/min)	Volumetric flow max. (L/min)	Weight (kg)
HK HZGO A 031 315	P1	6	315	2,5	40,0	3,8

## Accessories

HK EBM AS	Proportional amplifier digital
HK SP DIN 43650	Electrical plug for solenoid coil DIN 43650 / ISO 4400