


HK JPQ2

Flow control check valve

HANSA FLEX

Properties

| | |
|---------------------------|---------------------|
| Design | Sandwich body valve |
| Operating pressure | max. 350 bar |
| Volumetric flow | max. 160 l/min |
| Connection | ISO/Cetop 07 NG16 |

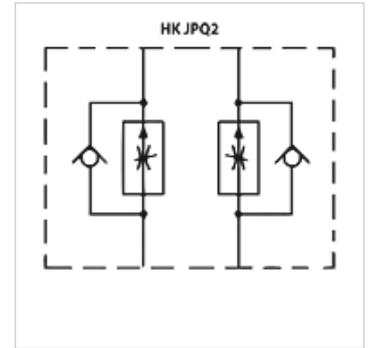

Note

These valves must be set according to the application.

Description

Sandwich body valve for constructing sandwich arrangements with ISO/Cetop 07 size 16 valves

Ordering information

Further sandwich body valves available on request

| Item | | | | |
|----------------|-----------------|---------------|-------------------|-------------|
| Identification | acts in channel | Design | Plate height (mm) | Weight (kg) |
| HK JPQ 212 | A + B | Drain control | 60 | 4,6 |
| HK JPQ 213 | A | Drain control | 60 | 4,6 |
| HK JPQ 214 | B | Drain control | 60 | 4,6 |
| HK JPQ 222 | A + B | Inlet control | 60 | 4,6 |
| HK JPQ 223 | A | Inlet control | 60 | 4,6 |
| HK JPQ 224 | B | Inlet control | 60 | 4,6 |