


Properties

| | |
|--------------------|---------------------|
| Design | Sandwich body valve |
| Operating pressure | max. 350 bar |
| Volumetric flow | max. 250 l/min |
| Connection | ISO/Cetop 08 NG25 |

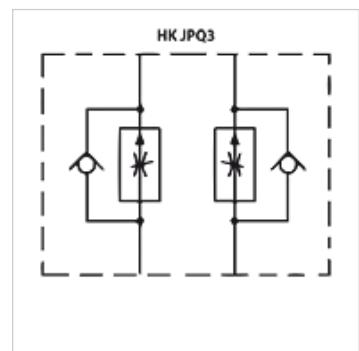

Note

These valves must be set according to the application.

Description

Sandwich body valve for constructing sandwich arrangements with ISO/Cetop 08 size 25 valves

Ordering information

Further sandwich body valves available on request

Item

| Identification | acts in channel | Design | Plate height (mm) | Weight (kg) |
|----------------|-----------------|---------------|-------------------|-------------|
| HK JPQ 312 | A + B | Drain control | 80 | 10,7 |
| HK JPQ 313 | A | Drain control | 80 | 10,7 |
| HK JPQ 314 | B | Drain control | 80 | 10,7 |
| HK JPQ 322 | A + B | Inlet control | 80 | 10,7 |
| HK JPQ 323 | A | Inlet control | 80 | 10,7 |
| HK JPQ 324 | B | Inlet control | 80 | 10,7 |