

HK K REL


Start relay for DC electric motor

HANSA FLEX

Properties

Design solenoid-switch start relay

Scope of supply with counter nut

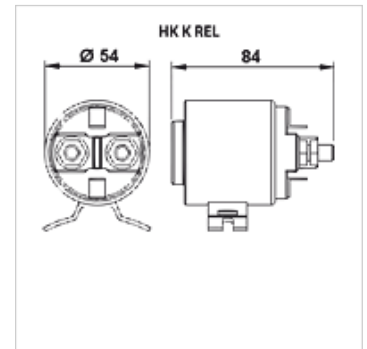

Item

Identification	Voltage	Current consumption (nominal) (A)	Current consumption max. (A)	Weight (kg)
HK K C	12 V	150	350	0,75
HK K C300	12 V	300	350	1,30
HK K E	24 V	150	350	0,73
HK K F	48 V	60	200	0,71

Accessory for following products

HK K C E-Motor 12V DC 12V electric motor

HK K C E-Motor 24V DC 24V electric motor

HK K C E-Motor 48V DC 48V electric motor