
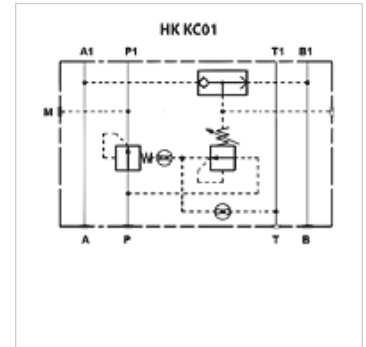


# HK KC 01

## 2-way pressure balance

### Properties

<b>Design</b>	Sandwich body valve pilot-controlled
<b>Operating pressure</b>	max. 350 bar
<b>Volumetric flow</b>	max. 100 l/min
<b>Connection</b>	ISO/Cetop 05 size 10



### Note

These valves must be set according to the application.

### Description

Sandwich body valve for constructing sandwich arrangements with ISO/Cetop 05 size 10 valves

The pressure balance maintains a constant pressure differential between connection P and connection A or B of the valve, to ensure that a constant flow rate is maintained in the event of pressure variations. The control pressure is diverted by the built-in shuttle valve.

### Ordering information

Further sandwich body valves available on request

### Item

Identification	acts in channel	Pressure setting range min. (bar)	Pressure setting range max. (bar)	Plate height (mm)	Weight (kg)
HK KC 011 30	P	5	35	60	2,8