


HK KZGO A 031

Proportional pressure reducing valve size 10

HANSA FLEX

Properties

Design	Proportional sandwich body valve pilot-controlled
Scope of supply	with coil, without plug
Operating pressure	max. 315 bar
Volumetric flow	max. 100 l/min
Connection	ISO/Cetop 05 size 10

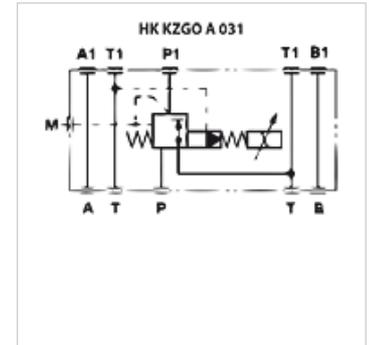

Description

Sandwich body valve for constructing sandwich arrangements with ISO/Cetop 05 size 10 valves
Without integrated pressure transducer (a pcb Type HK EBM AS is required for control)
Completely encapsulated solenoid coils
Plate height: 50 mm
Response time < 80 ms
Hysteresis < 2%

Item

Identification	acts in channel	Pressure setting range min. (bar)	Pressure setting range max. (bar)	Volumetric flow min. (L/min)	Volumetric flow max. (L/min)	Weight (kg)
HK KZGOA 031 315	P1	6	315	3,0	100,0	4,4

Accessories

HK EBM AS	Proportional amplifier digital
HK SP DIN 43650	Electrical plug for solenoid coil DIN 43650 / ISO 4400