

# HK MPF GEH


Housing for return flow filter MPF

**HANSA FLEX**

## Properties

**Design** with bypass valve 1.75 bar, without clogging indicator  
without filter element

**Operating pressure** max. 8 bar

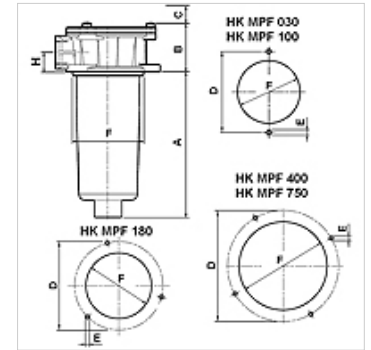

## Note

Dimension "C": clearance required for changing the filter element

## Description

Return flow filter for fitting into the tank cap; dimensions for drilling pattern see graphic.

Connector for clogging indicator G 1/8" closed with bolt

## Ordering information

Filter element is not included. Please order separately.

Item	Identification	Line connection	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	H (mm)	Weight (kg)
	HK MPF 030 1 G1	G 1/2"	86	56,0	100	90	7,0	66,0	22,0	0,28
	HK MPF 100 1 G1	G 1/2"	100	80,0	120	115	8,5	88,0	28,0	0,58
	HK MPF 100 1 G2	G 3/4"	100	80,0	120	115	8,5	88,0	28,0	0,58
	HK MPF 100 1 G3	G 1"	100	80,0	120	115	8,5	88,0	28,0	0,58
	HK MPF 100 2 G2	G 3/4"	150	80,0	170	115	8,5	88,0	28,0	0,60
	HK MPF 100 2 G3	G 1"	150	80,0	170	115	8,5	88,0	28,0	0,60
	HK MPF 100 3 G2	G 3/4"	225	80,0	250	115	8,5	88,0	28,0	0,64
	HK MPF 100 3 G3	G 1"	225	80,0	250	115	8,5	88,0	28,0	0,64
	HK MPF 180 1 G1	G 1.1/4"	231	89,0	250	175	10,7	129,0	35,0	1,41
	HK MPF 400 1 G1	G 1.1/4"	178	98,5	200	220	11,5	173,5	38,5	2,87
	HK MPF 400 2 G2	G 1.1/2"	238	98,5	250	220	11,5	173,5	38,5	2,74
	HK MPF 400 2 G3	G 2"	238	98,5	250	220	11,5	173,5	38,5	2,74
	HK MPF 400 3 G3	G 2"	288	98,5	310	220	11,5	173,5	38,5	2,86
	HK MPF 750 1 G1	G 2"	430	105,0	450	220	11,5	173,5	48,5	4,36

## Accessories

HK MPF TE Pipe extension for return flow filter MPF

HK VA MAN Clogging indicator pressure gauge

## Spare parts

HK MF P10 / A10 Filter element for return flow filter MPF