


HK PRRS

3-way pressure reduction valve PRRS

Properties

| | |
|--------------------|------------------|
| Design | pilot-controlled |
| Operating pressure | max. 350 bar |

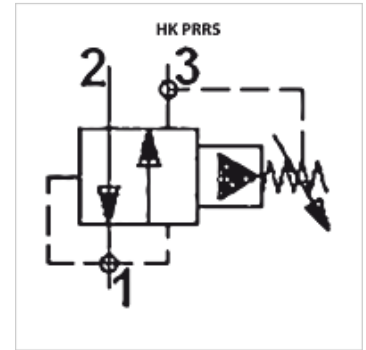

Note

These valves must be set according to the application.
Tightening torque for valve size 10 with Alu housing: 47-54 Nm
Tightening torque for valve size 10 with Steel housing: 74-81 Nm

Description

Setting via setscrew

Item

| Identification | Setting range min. (bar) | Setting range max. (bar) | Pressure max. (bar) | Volumetric flow max. (L/min) | Screw-in housing | Screw-in thread | Weight (kg) |
|-------------------|--------------------------|--------------------------|---------------------|------------------------------|------------------|------------------------|-------------|
| HK PRRS 10 NS0 06 | 5 | 40 | 350 | 46,0 | HK GEH 38 C1030 | SAE 10/2 7/8"-14UNF-2B | 0,2 |
| HK PRRS 10 NS0 15 | 5 | 100 | 350 | 46,0 | HK GEH 38 C1030 | SAE 10/2 7/8"-14UNF-2B | 0,2 |
| HK PRRS 10 NS0 30 | 5 | 210 | 350 | 46,0 | HK GEH 38 C1030 | SAE 10/2 7/8"-14UNF-2B | 0,2 |

Accessories

| | |
|---------------|---|
| HK GEH 30 AL | Aluminium housing for SAE 3-way cartridge valve |
| HK GEH 30 GGG | GGG40 housing for SAE 3-way cartridge valve |