
HK PRRS

3-way pressure reduction valve PRRS

Properties

Design	pilot-controlled
Operating pressure	max. 350 bar



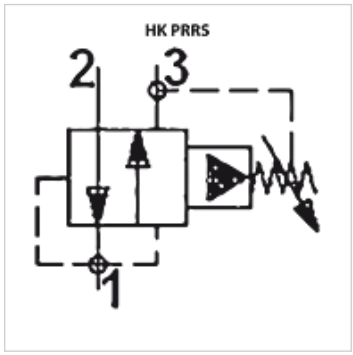

Note

These valves must be set according to the application.
Tightening torque for valve size 10 with Alu housing: 47-54 Nm
Tightening torque for valve size 10 with Steel housing: 74-81 Nm

Description

Setting via setscrew

Item

Identification	Setting range min. (bar)	Setting range max. (bar)	Pressure max. (bar)	Volumetric flow max. (L/min)	Screw-in housing	Screw-in thread	Weight (kg)
HK PRRS 10 NS0 06	5	40	350	46,0	HK GEH 38 C1030	SAE 10/2 7/8"-14UNF-2B	0,2
HK PRRS 10 NS0 15	5	100	350	46,0	HK GEH 38 C1030	SAE 10/2 7/8"-14UNF-2B	0,2
HK PRRS 10 NS0 30	5	210	350	46,0	HK GEH 38 C1030	SAE 10/2 7/8"-14UNF-2B	0,2

Accessories

HK GEH 30 AL	Aluminium housing for SAE 3-way cartridge valve
HK GEH 30 GGG	GGG40 housing for SAE 3-way cartridge valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.