


Properties

| | |
|-------------|-----------------------|
| Connections | 1/4" - male thread |
| Material | Stainless steel |
| Use | For gauge HK PTQCheck |

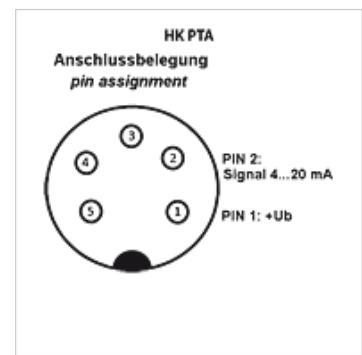

Description

Resistant to pressure peaks, extremely shock and vibration-resistant

Output signal 4 to 20 mA

Various measuring ranges up to 600 bar

Measuring accuracy $\pm 0.5\%$ of range limit value

Outer thread 1/4" fitting

Ordering information

Further accessories and gauges with additional options available on request.

Order adapter HFM MMD 1/4 (when connecting pressure transmitter and measuring turbine) separately

| Item | Identification | Measuring range | Pressure max. (bar) | Overload pressure max. (bar) | Connection | Weight (kg) |
|------------|----------------|-----------------|------------------------|---------------------------------|----------------------|----------------|
| HK PTA 101 | | -1 to 10 bar | 10 | 20 | G 1/4" - male thread | 0,1 |
| HK PTA 060 | | 0 to 60 bar | 60 | 120 | G 1/4" - male thread | 0,1 |
| HK PTA 200 | | 0 to 200 bar | 200 | 400 | G 1/4" - male thread | 0,1 |
| HK PTA 400 | | 0 to 400 bar | 400 | 600 | G 1/4" - male thread | 0,1 |
| HK PTA 600 | | 0 to 600 bar | 600 | 800 | G 1/4" - male thread | 0,1 |

Accessory for following products

HK PTQ CHECK Digital hand-held gauge, 5-channels

Additional elements

| | |
|-------------|--------------------------------------|
| HK PML | Single instrumentation cable |
| HK PQT | Combination instrumentation cable |
| HFM MMD HKO | Measuring connection, M16 x 2 series |