


# HK REM

Pressure relief valve with SAE connector

**HANSA FLEX**

## Properties

<b>Design</b>	SAE flange connector (e.g. for direct fitting to pumps)
<b>Scope of supply</b>	incl. SAE flanges and M10 screws
<b>Operating pressure</b>	max. 350 bar

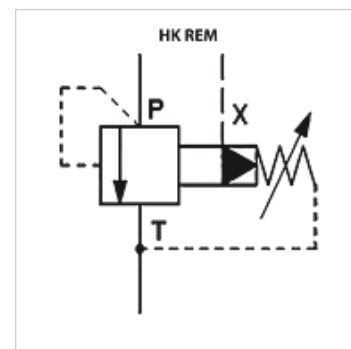

## Description

Pilot-controlled pressure relief valve with damping plunger

Version with solenoid relief valve for pressure-free circulation of the pump see HK REM 24

Max. volumetric flow 600 l/min

For mineral- based hydraulic oil or synthetic fluids with comparable properties

## Item

Identification	Connection	Pressure setting range min. (bar)	Pressure setting range max. (bar)	Volumetric flow max. (L/min)	Weight (kg)
HK REM 3 350	SAE flange 3/4"	8	350	200,0	6,6
HK REM 4 210	SAE flange 1"	7	210	400,0	6,8
HK REM 5 210	SAE flange 1.1/4"	7	210	600,0	8,2