
HK RVPS

Pressure relief valve RVPS

Properties

Design	pilot-controlled
Operating pressure	max. 350 bar



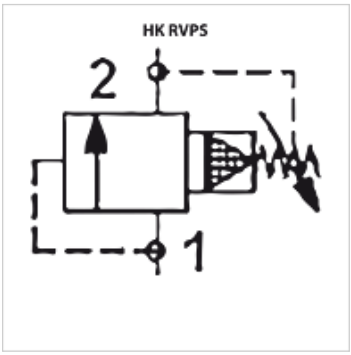

Note

These valves must be set according to the application.
Tightening torque for valve size 12 with Alu housing: 74-81 Nm
Tightening torque for valve size 12 with Steel housing: 95-102 Nm

Description

Setting via setscrew

Item

Identification	Setting range min. (bar)	Setting range max. (bar)	Volumetric flow max. (L/min)	Screw-in housing	Screw-in thread	Weight (kg)
HK RVPS 12 NS0 15	7	105	230,0	HK GEH 12 C1220 / HK GEH 34 C1220	SAE 12/2 1.1/16"-12UNF-2B	0,25
HK RVPS 12 NS0 50	35	350	230,0	HK GEH 12 C1220 / HK GEH 34 C1220	SAE 12/2 1.1/16"-12UNF-2B	0,25

Accessories

HK GEH 20 AL	Aluminium housing for SAE 2-way cartridge valve
HK GEH 20 GGG	GGG40 housing for SAE 2-way cartridge valve

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.