


# HK RVPS

Pressure relief valve RVPS

## Properties

|                    |                  |
|--------------------|------------------|
| Design             | pilot-controlled |
| Operating pressure | max. 350 bar     |

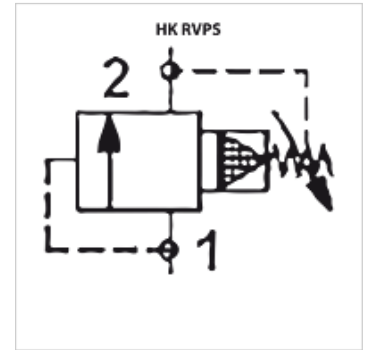

## Note

These valves must be set according to the application.  
Tightening torque for valve size 12 with Alu housing: 74-81 Nm  
Tightening torque for valve size 12 with Steel housing: 95-102 Nm

## Description

Setting via setscrew

| Item | Identification    | Setting range min. (bar) | Setting range max. (bar) | Volumetric flow max. (L/min) | Screw-in housing                  | Screw-in thread           | Weight (kg) |
|------|-------------------|--------------------------|--------------------------|------------------------------|-----------------------------------|---------------------------|-------------|
|      | HK RVPS 12 NS0 15 | 7                        | 105                      | 230,0                        | HK GEH 12 C1220 / HK GEH 34 C1220 | SAE 12/2 1.1/16"-12UNF-2B | 0,25        |
|      | HK RVPS 12 NS0 50 | 35                       | 350                      | 230,0                        | HK GEH 12 C1220 / HK GEH 34 C1220 | SAE 12/2 1.1/16"-12UNF-2B | 0,25        |

## Accessories

|               |   |
|---------------|---|
| HK GEH 20 AL  | Aluminium housing for SAE 2-way cartridge valve |
| HK GEH 20 GGG | GGG40 housing for SAE 2-way cartridge valve     |