
HK RZGO A 033

Proportional pressure reducing valve size 6

Properties

Design	Proportional plate mounting valve pilot-controlled
Scope of supply	with coil, without plug
Operating pressure	max. 315 bar
Volumetric flow	max. 40 l/min
Connection	ISO/Cetop 03 size 6



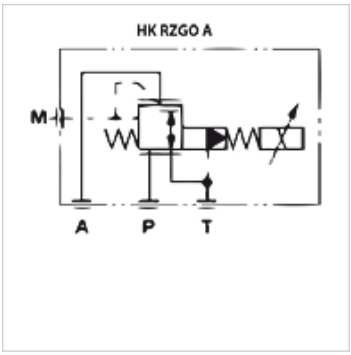

Description

Without integrated pressure transducer (a pcb Type HK EBM AS is required for control)
Completely encapsulated solenoid coils
Response time < 50 ms
Hysteresis < 2%

Item

Identification	acts in channel	Pressure setting range min. (bar)	Pressure setting range max. (bar)	Volumetric flow min. (L/min)	Volumetric flow max. (L/min)	Weight (kg)
HK RZGO A 033 210	A	6	210	2,5	40,0	2,7

Accessories

HK EBM AS	Proportional amplifier digital
HK SP DIN 43650	Electrical plug for solenoid coil DIN 43650 / ISO 4400
HK M HK DH	Screw set for NG 6 valves type HK DH / DG4V3

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.