
HK RZMO A 010

Proportional pressure relief valve size 6

Properties

Design	Proportional plate mounting valve direct-controlled
Scope of supply	with coil, without plug
Operating pressure	max. 315 bar
Volumetric flow	max. 4 l/min
Connection	ISO/Cetop 03 NG6 (only P + T)



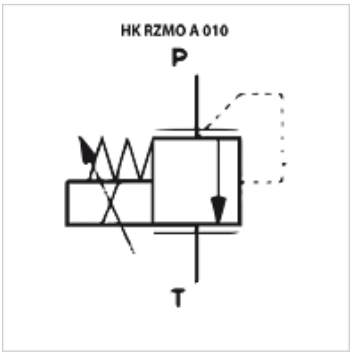

Description

Without integrated pressure transducer (a pcb Type HK EBM AS is required for control)
Completely encapsulated solenoid coils
Response time < 70 ms
Hysteresis < 1,5%

Item

Identification	acts in channel	Pressure setting range min. (bar)	Pressure setting range max. (bar)	Volumetric flow max. (L/min)	Weight (kg)
HK RZMO A 010 210	P	4	210	4,0	1,8

Accessories

HK EBM AS	Proportional amplifier digital
HK SP DIN 43650	Electrical plug for solenoid coil DIN 43650 / ISO 4400
HK M HK DH	Screw set for NG 6 valves type HK DH / DG4V3

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.