


# HK TA G

## Tank venting filters

### Properties

<b>Design</b>	Screw-in version
<b>Temp. min.</b>	-30 °C
<b>Temp. max.</b>	100 °C
<b>Material</b>	Chrome-plated steel
<b>Air volume</b>	HK TA 80 G: max. 450 l/min - for filter 3µm HK TA 80 G: max. 550 l/min - for filter 10µm

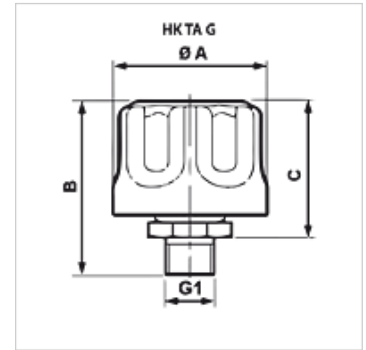

### Ordering information

Available on request: Filler neck with closing tag and/or precharging valve, other sizes and types

### Item

Identification	Filter mesh size (µm)	Thread	A (mm)	B (mm)	Mounting	C (mm)	Ø A (mm)	Tank bore	Weight (kg)
HK TA 80 G 03	3	G 3/4"	80	68	G 3/4"	52	80,00	G 3/4"	0,22
HK TA 80 G 10	10	-	80	68	G 3/4"	52	80,00	G 3/4"	0,22