


Properties

Design	internal temperature controller (preset at 20°C)
Scope of supply	incl. connection cable 3-pole and cable entry M20x1.5
Use	for preheating of hydraulic oil

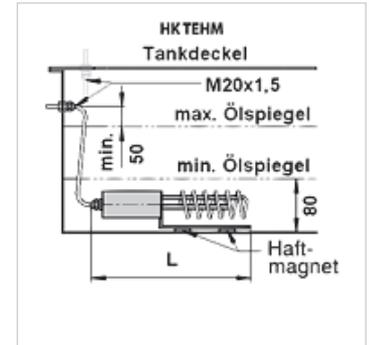

Description

For horizontal or vertical installation below the oil surface
 Simple retrofitting in existing tanks, no draining of the oil necessary
 Switching precision $\pm 3\%$
 Surface load 1.2 W/cm² for hydraulic oils

Item

Identification	Heating capacity (W)	Immersion depth (mm)	L (mm)	Voltage	Weight (kg)
HK TEHM 1000	1000	1000	400	230 V	1,65