


HK TS

TS temperature switch

Properties

Design	1 temperature contact with seal
Operating pressure	max. 1 bar
Operating temperature max.	80 °C
Current consumption	max. 1 A at 250 VAC
Hysteresis	10 K ± 5 K
Scope of supply	incl. connector

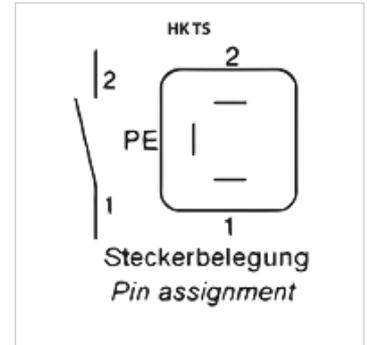

Item

Identification	Switching temperature (°C)	Switching function	Weight (kg)
HK TS 50 NC-12	50	NC contact	0,31
HK TS 60 NC-12	60	NC contact	0,31
HK TS 70 NC-12	70	NC contact	0,31
HK TS 80 NC-12	80	NC contact	0,31
HK TS 50 NO-12	50	NO contact	0,31
HK TS 60 NO-12	60	NO contact	0,31
HK TS 70 NO-12	70	NO contact	0,31
HK TS 80 NO-12	80	NO contact	0,31