
HK TS
TS temperature switch

Properties

Design	1 temperature contact \nwith seal
Operating pressure	max. 1 bar
Operating temperature max.	80 °C
Current consumption	max. 1 A at 250 VAC
Hysteresis	10 K ± 5 K
Scope of supply	incl. connector



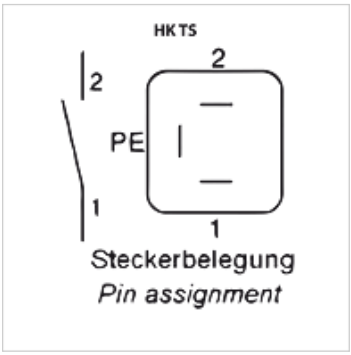

Item

Identification	Switching temperature (°C)	Switching function	Weight (kg)
HK TS 50 NC-12	50	NC contact	0,31
HK TS 60 NC-12	60	NC contact	0,31
HK TS 70 NC-12	70	NC contact	0,31
HK TS 80 NC-12	80	NC contact	0,31
HK TS 50 N0-12	50	NO contact	0,31
HK TS 60 N0-12	60	NO contact	0,31
HK TS 70 N0-12	70	NO contact	0,31
HK TS 80 N0-12	80	NO contact	0,31

Despite careful checking, we cannot guarantee the accuracy of all information included on this site, and we accept no liability.